
# Deluxe 8 Foot Picnic Table


For Fastener Pack (FP-DPT8-CU-03)

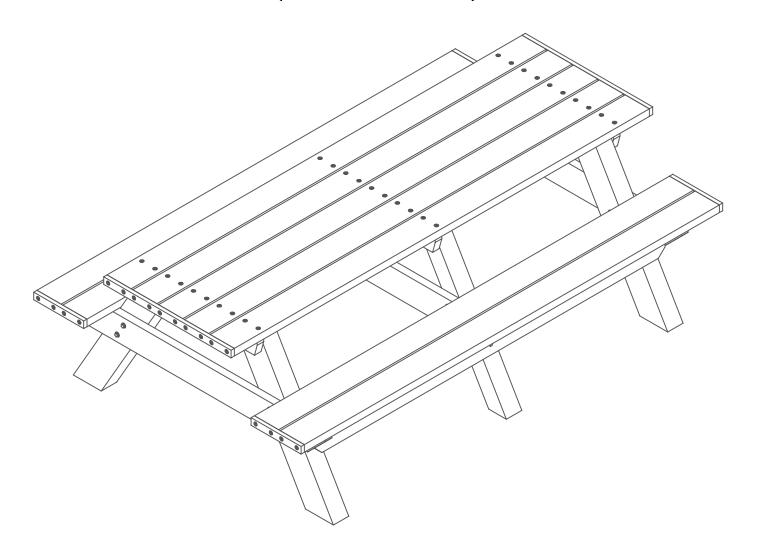

Congratulations!!


You have purchased the finest recycled plastic picnic table available. Enjoy!!!

Before assembly, please check to make sure all components are included.

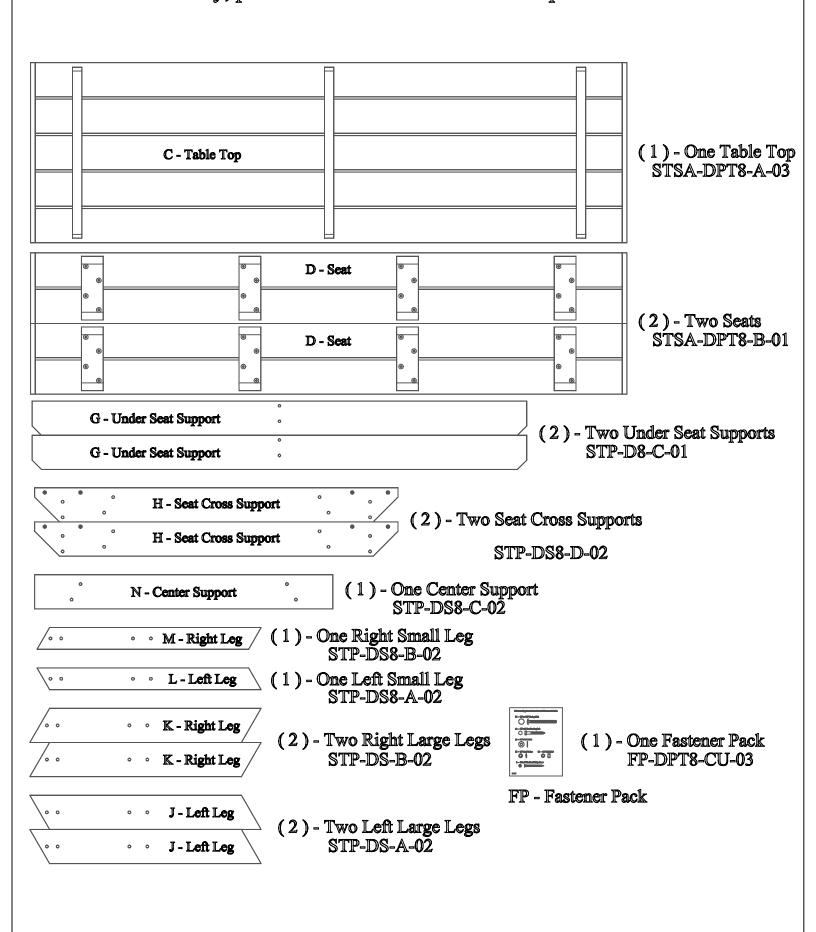


Before assembly, please check to make sure all faste	mers are included.
24 - 3/8" x 5" Hex Head Bolt	
12 - 3/8" x 3" Hex Head Lag Bolt	
60 - 3/8" Flat Washer	
24 - 3/8" Nylon Lock Nut	

8 - #12 x 3" Phillips Head Flat Screw




Also needed for this assembly will be the following materials:

- 1 #3 Phillips Drive Bit
- 2 9/16" Socket Wrench

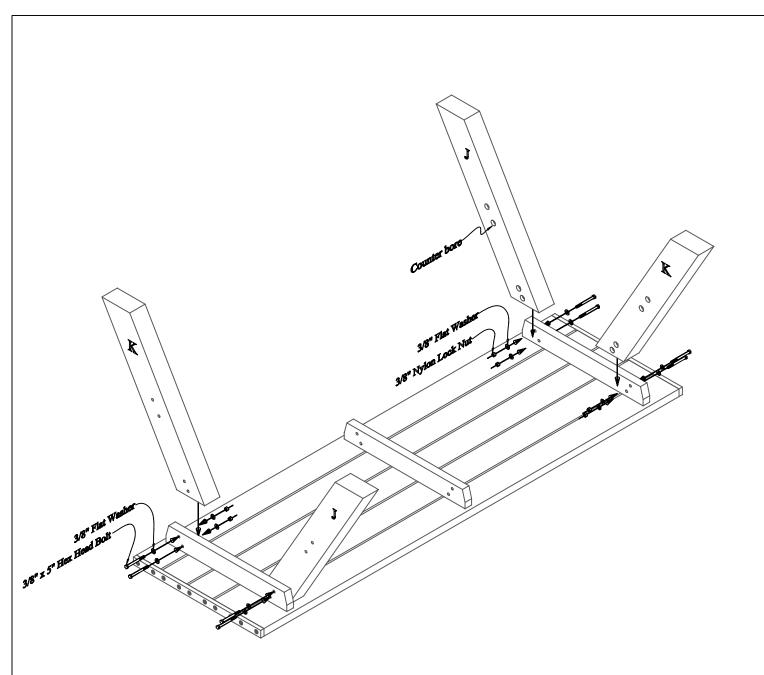


# Step #1:

While the table top is upside-down, fasten the large legs to the left and right top supports being sure that the counter bores are pointing toward the center of the table as shown above. Use (1) One 3/8" x 5" Hex Head Bolt and (1) 3/8" Flat Washer along with, (1) One 3/8" Flat Washer and (1) One 3/8" Nylon Lock Nut per hole to secure.

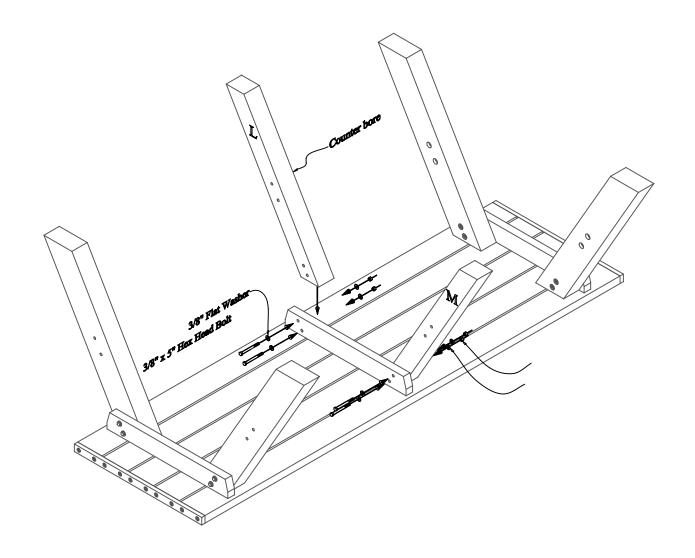


## Step #2:

While the table top is upside-down, fasten the small legs to the center top support being sure that the counter bores are pointing away from the top support as shown above. Use (1) One 3/8" x 5" Hex Head Bolt and (1) One 3/8" Flat Washer along with, (1) One 3/8" Flat Washer and (1) One 3/8" Nylon Lock Nut per hole to secure.

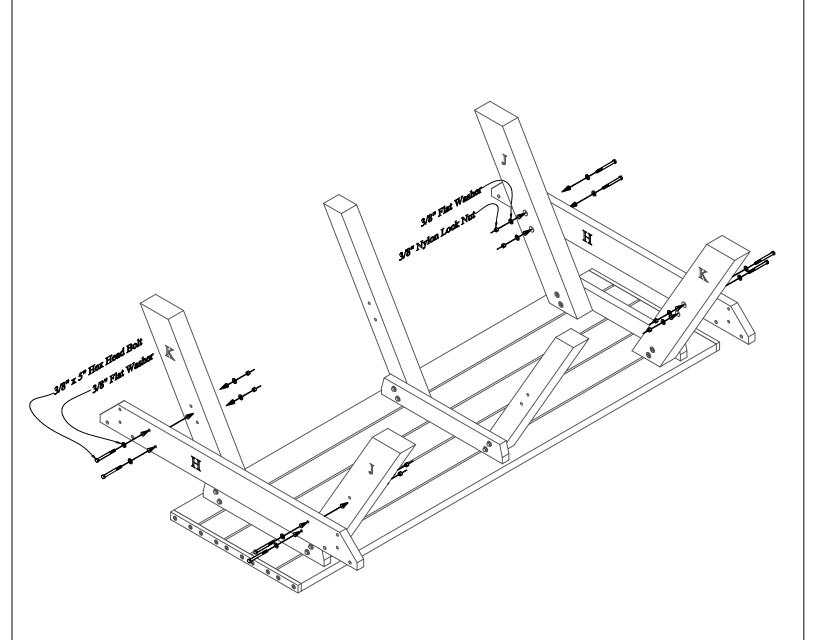

## Step #3:

While the table is upside-down, fasten the seat cross supports to the large legs. Use (1) One 3/8" x 5" Hex Head Bolt and (1) One 3/8" Flat Washer along with (1) One 3/8" Flat Washer and (1) One 3/8" Nylon Lock Nut per hole to secure.

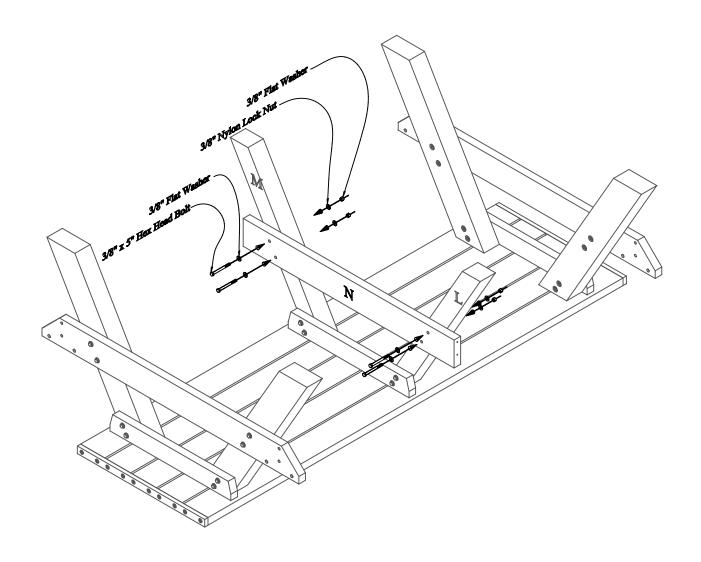


#### Step #4:

While the table is upside-down, fasten the center support to the small legs. Use (1) One 3/8" x 5" Hex Head Bolt and (1) One 3/8" Flat Washer along with (1) One 3/8" Flat Washer and (1) One 3/8" Nylon Lock Nut per hole to secure.

### Step #5:


While the table top is upside-down, fasten the under seat supports to the seat cross supports. Use (1) One 3/8" x 3" Hex Head Lag Bolt and (1) One 3/8" Flat Washer per hole to secure.

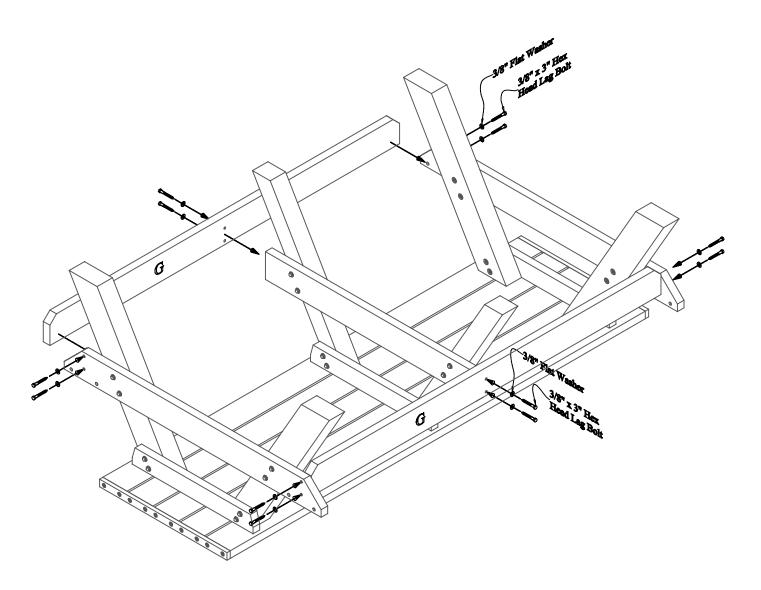

#### Step #6:


Secure the under seat supports completely by fastening to the center support. Use (1) One 3/8" x 3" Hex Head Lag Bolt and (1) One 3/8" Flat Washer per hole to secure.

Note: Be sure to tighten all loose bolts after these steps are complete.

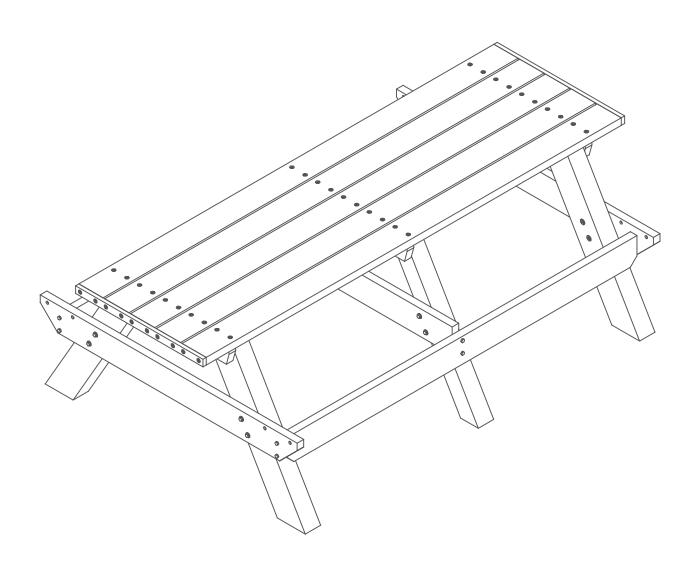

## Step #7:

Flip the table upright onto the legs. Please take caution while flipping the table. At this point in assembly the table weighs approximately 315 Pounds.

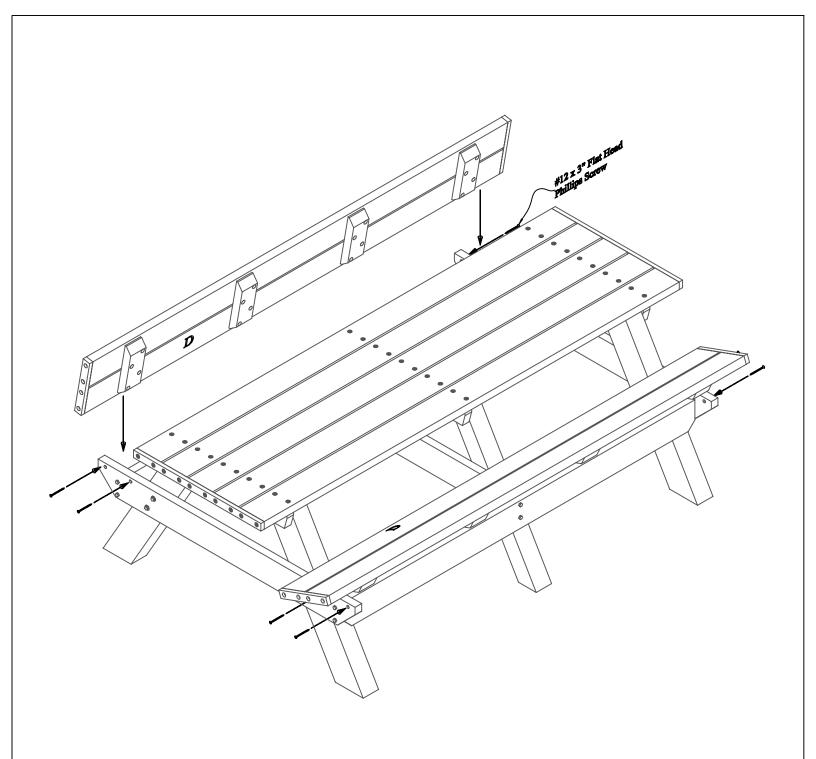

## Step #8:

While the table is upright fasten the seats to the seat cross supports and being sure to center all holes over boards. Use (1) One #12 x 3" Flat Head Phillips Screw per hole to secure.