


Round Picnic Table


For Fastener Pack
(FP-ORT-CU-03)

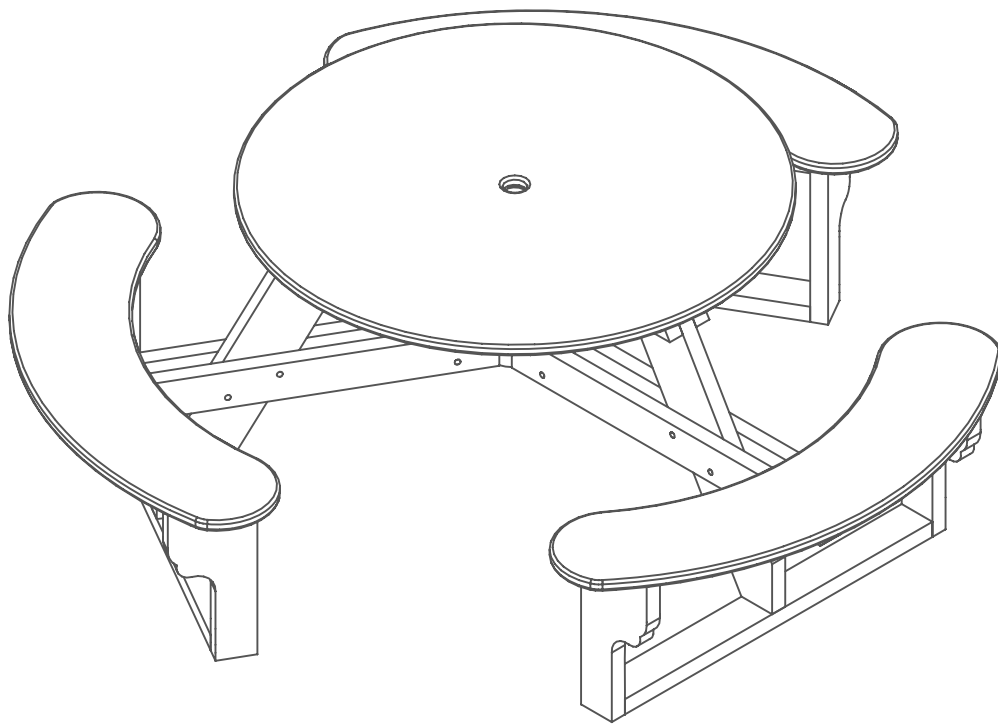

Congratulations ! !

You have just purchased the finest recycled plastic
picnic table available. Enjoy ! ! !


Before assembly, please make sure all components are included.

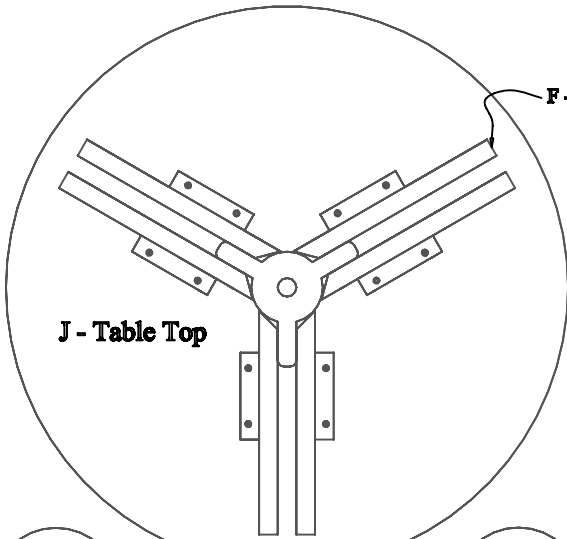

J - Table Top


F - Small Spoke Assembly

(1) - One Table Top w/ Small Spoke Assembly
OTSA-R-A-03




B - Plastic Bracket

(12) - Twelve Plastic Bracket
OTP-HRA-I-01



FP - Fastener Pack

(1) - One Fastener Pack
FP-ORT-CU-03

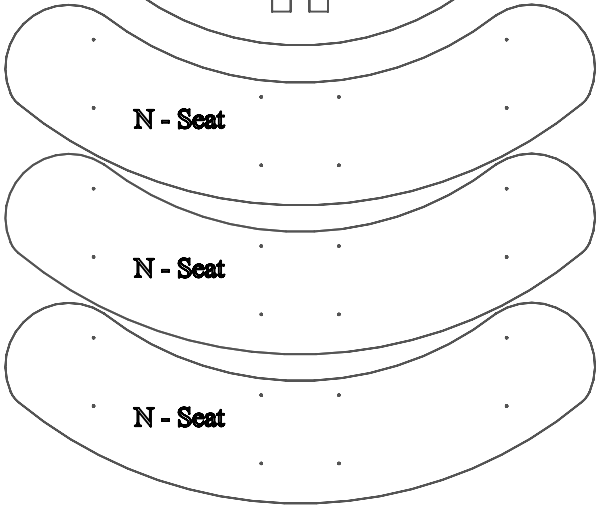


N - Seat

N - Seat

N - Seat

(3) - Three Seats
OTP-R-B-02

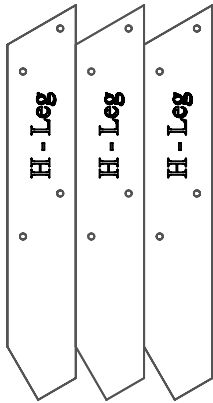


H - Leg

H - Leg

H - Leg

(3) - Three Legs
OTP-HRA-G-01

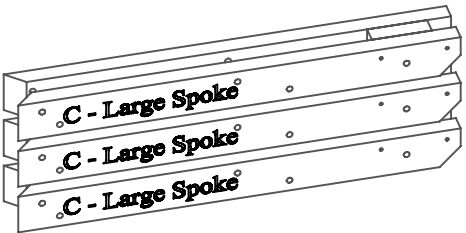

C - Large Spoke


C - Large Spoke

C - Large Spoke

(3) - Three Large Spokes
OTSA-HRA-A-02


A - Leg Support
A - Leg Support
A - Leg Support

(3) - Three Leg Supports
OTP-HRA-A-01



R - Center Propeller

(1) - One Center Propeller
PS-OTC-A-01

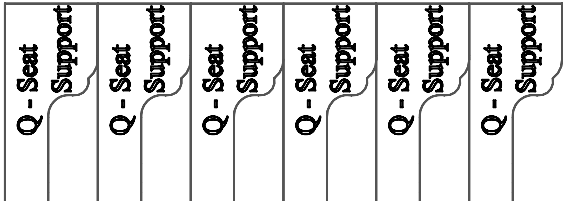

Q - Seat Support

Q - Seat Support

Q - Seat Support

Q - Seat Support

Q - Seat Support

Q - Seat Support


(6) - Six Seat Supports
OTP-HRA-H-01

Before assembly, please make sure all fasteners are included.


18 - 3/8" x 5" Hex Head Bolt



36 - 3/8" Flat Washer



18 - 3/8" Nylon Lock Nut

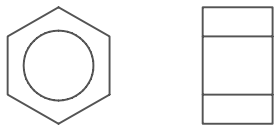

6 - #12 x 3" Flat Head Phillips Screw



12 - #12 x 2 1/2" Flat Head Phillips Screw



48 - #12 x 2" Flat Head Phillips Screw




Also needed for this assembly will be the following materials:

1 - #3 Phillips Drive Bit

2 - 9/16" Socket Wrench


Step #1:

Assemble the large spokes to the center propeller as shown below. Use (1) One 3/8" x 5" Hex Head Bolt and (1) One 3/8" Flat Washer, along with (1) One 3/8" Flat Washer and (1) One 3/8" Nylon Lock Nut per hole to secure.

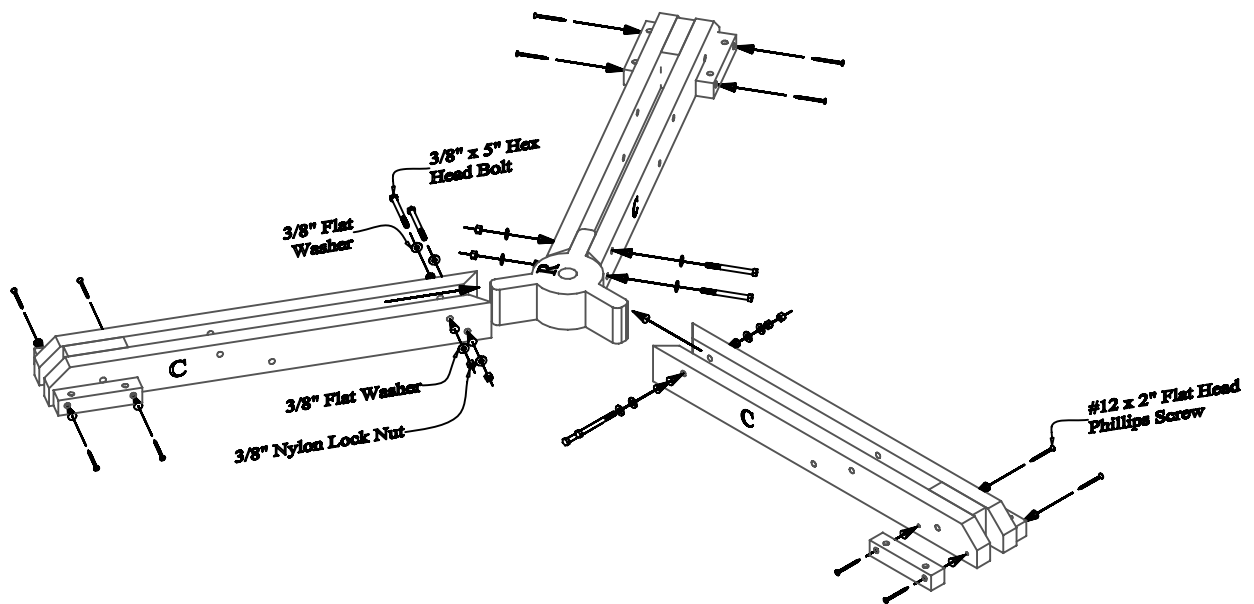

Step #2:


Place the 7" Plastic Brackets onto the center propeller as shown above. Align the pre-drilled holes in the Plastic Brackets with the pilot holes in the center propeller. Use (1) One #12 x 2" Flat Head Phillips Screw per hole to secure.

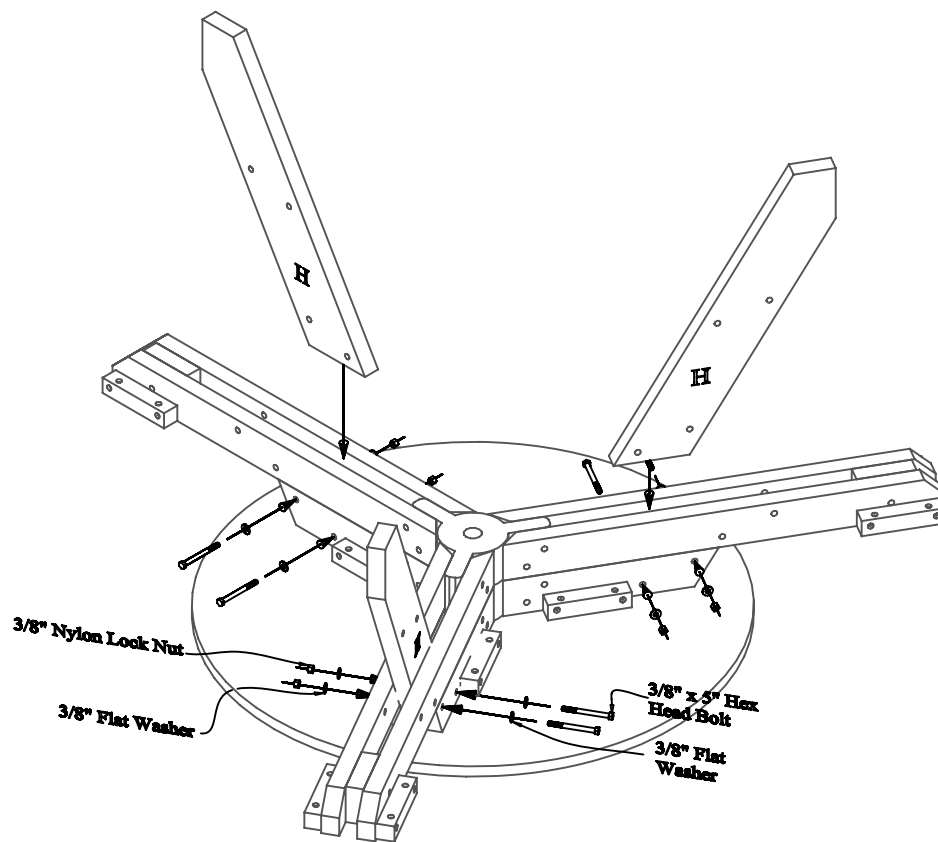

Step #3:

Place the Table Top assembly upside down onto a piece of cardboard or another soft surface to protect it during installation. Place the large spoke assembly onto the small spoke assembly as shown above. Slide (1) One leg between the propellers of each spoke assembly. Secure the legs to the small spoke assembly. Use (1) One 3/8" x 5" Hex Head Bolt and (1) One 3/8" Flat Washer, along with (1) One 3/8" Flat Washer and (1) One 3/8" Nylon Lock Nut per hole to secure.

Do not tighten bolts completely. This will be done in a later step.

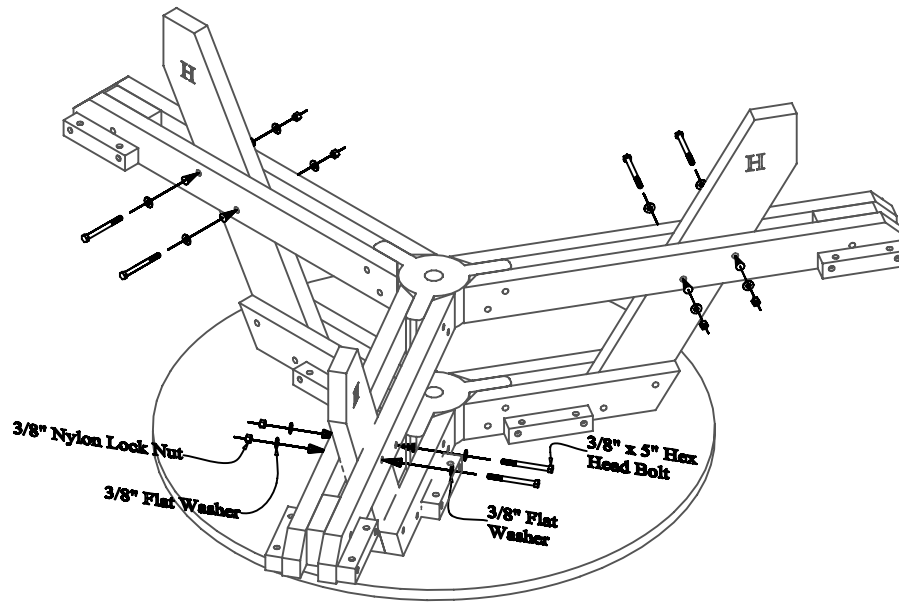


Step #4:

While the table is upside down, slide the large spoke assembly up to match the holes to the legs. Secure the large spoke assembly to the legs as shown above. Use (1) One 3/8" x 5" Hex Head Bolt and (1) One 3/8" Flat Washer, along with (1) One 3/8" Flat Washer and (1) One 3/8" Nylon Lock Nut per hole to secure.

Be sure to tighten all loose bolts after completing this step.


Step #5:

Place the 7" Plastic Brackets onto the Seat Supports as shown below. Align the pre-drilled holes in the Plastic Brackets with the pilot holes in the Seat Supports. Use (1) One #12 x 2" Flat Head Phillips Screw per hole to secure..

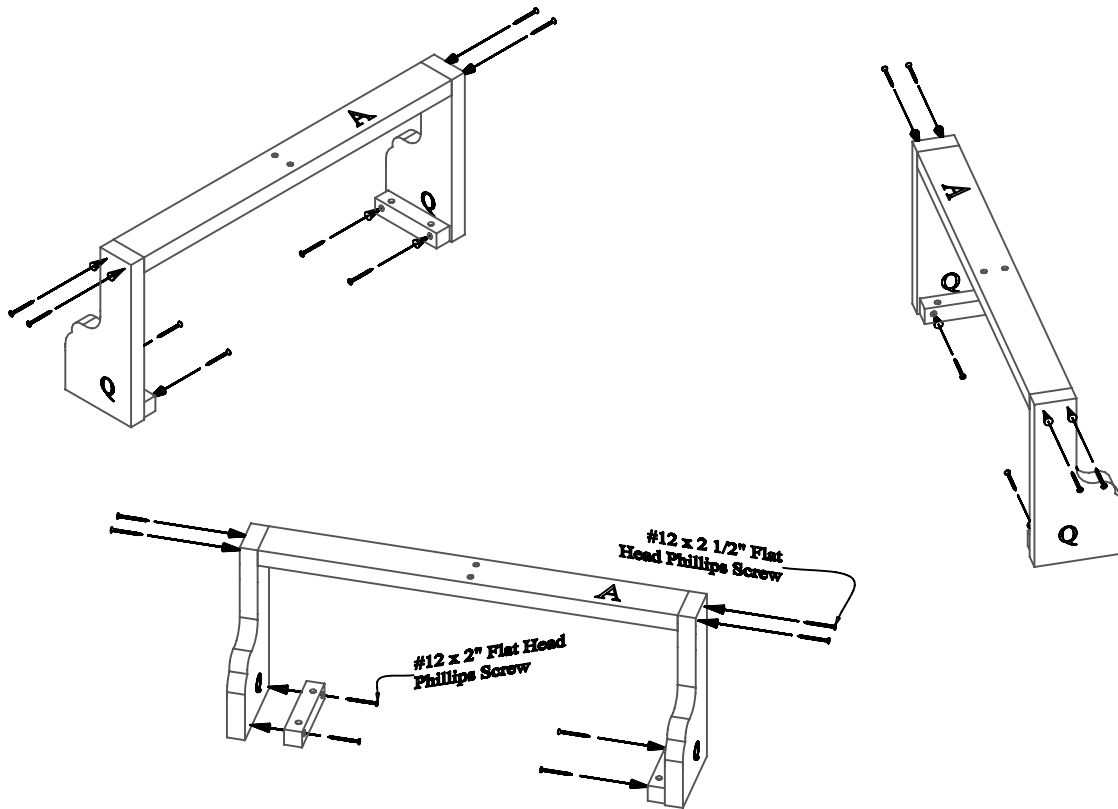

Step #6:

Fasten (2) Two seat supports onto each end of (1) One leg support. Be sure that each seat support when fastened are pointing in the same direction, and the countersinks in the leg support are facing away from the seat supports as shown above. Use (1) One #12 x 2 1/2" Flat Head Phillips Screw per hole to secure.

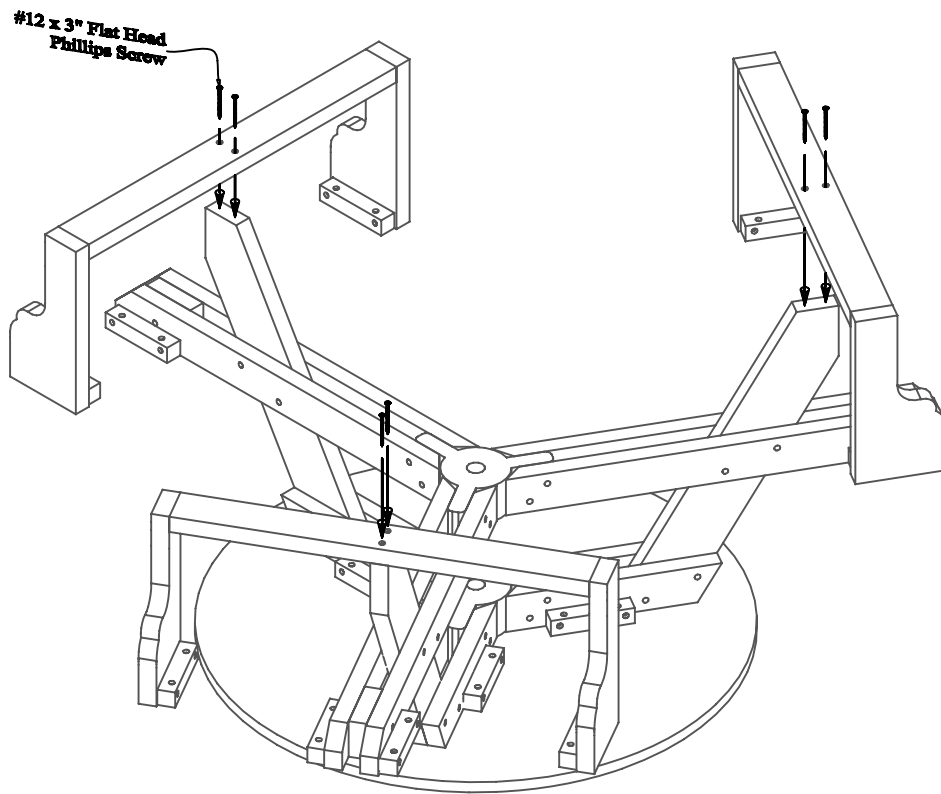


Step #7:

While the table is upside down, place the seat support assembly onto the legs as shown above. Align the pre-drilled holes in the seat support assembly with the pilot holes in the legs. Use (1) One #12 x 3" Flat Head Phillips Screw per hole to secure.

Step #8:

While the table is upside down, fasten the seats to the large spoke assembly and seat support assemblies as shown below. Align the pre-drilled holes in the large spoke assembly and seat support assemblies with the pilot holes in the seats. Use (1) One #12 x 2" Flat Head Phillips Screw per hole to secure. Please use caution while tightening the screws to not strip the threads out.

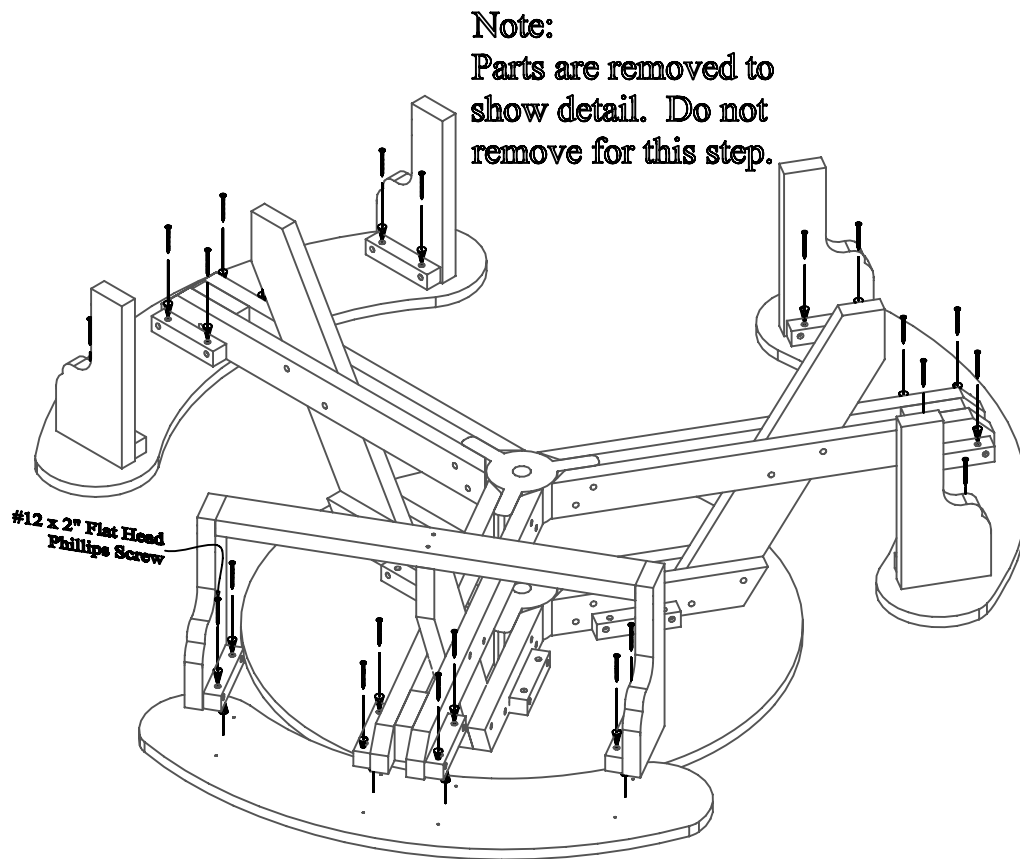

Step #9:

Turn the table upright onto it's frame. Be sure not to slide the table top on any rough surfaces. This will damage your table top. Please take caution while turning the table over. At this point in assembly the table weighs approximately 212 Pounds.

DEAR VALUED CUSTOMER,

THANK YOU FOR PURCHASING THIS
PRODUCT. THIS PRODUCT IS
MANUFACTURED USING RECYCLED
MATERIALS AND MAY HAVE SLIGHT
COLOR VARIATIONS, OCCASIONAL
SPECKS OF COLOR OR IRREGULAR
SURFACE PATTERNS. THESE ARE
NORMAL CONDITIONS OF RECYCLED
PLASTICS AND MAKE EACH PIECE OF
FURNITURE UNIQUE. THESE
CHARACTERISTICS DO NOT AFFECT
THE STRENGTH, QUALITY OR
PERFORMANCE OF THE PRODUCT.

THANK YOU AGAIN FOR PURCHASING
THIS PRODUCT AND HELPING OUR
ENVIRONMENT.