


# Standard 8 Foot Picnic Table


For Fastener Pack  
(FP-SPT8-CU-03)

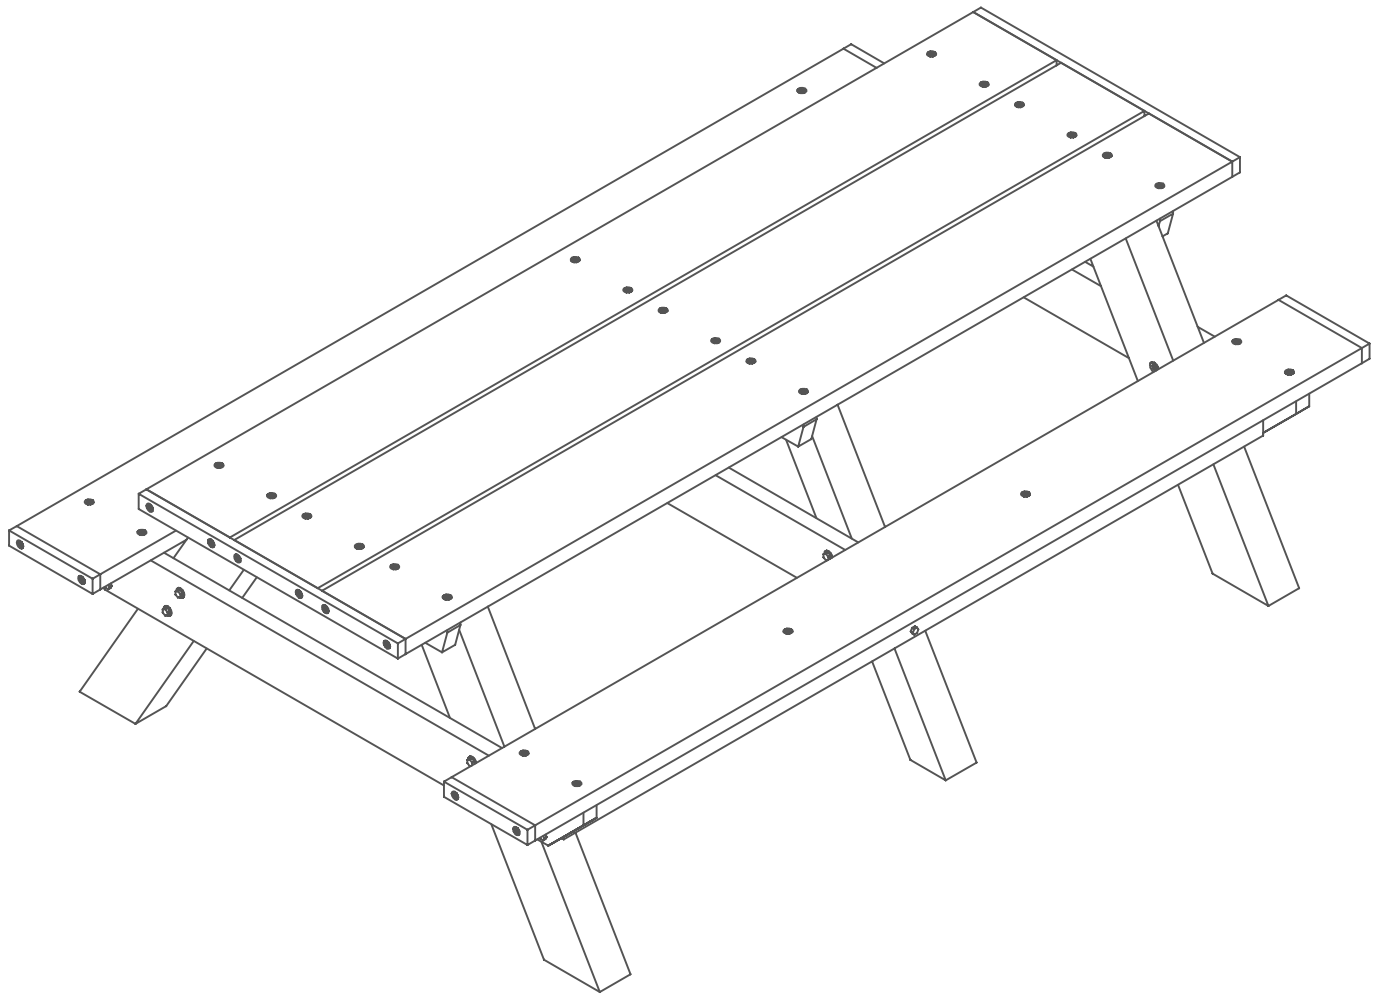


Congratulations ! !

You have purchased the finest recycled plastic  
picnic table available. Enjoy ! ! !

Before assembly, please check to make sure all components are included.

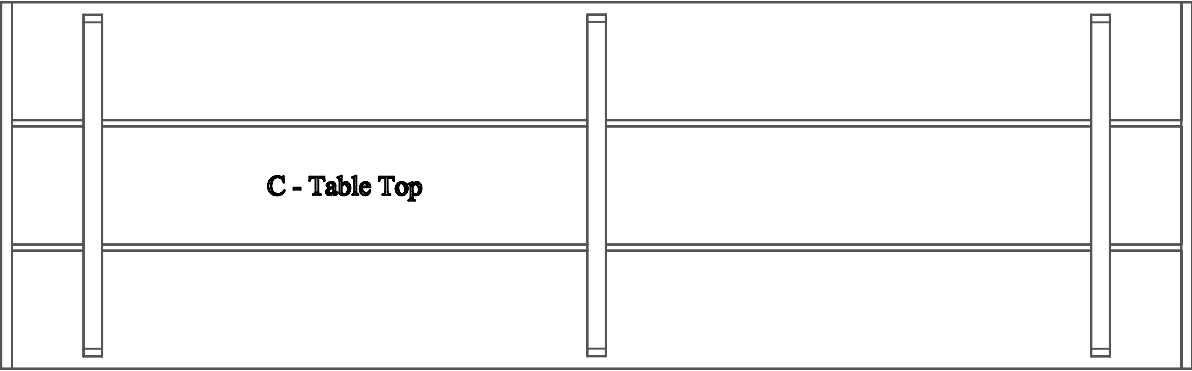


( 1 ) - One Table Top  
STSA-SPT8-A-03

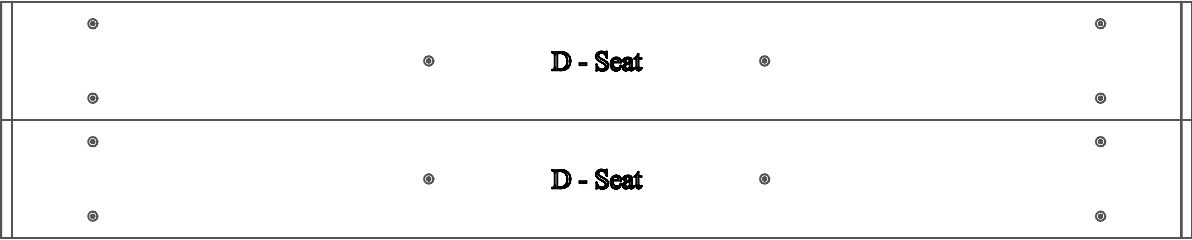

( 2 ) - Two Seats  
STSA-SPT8-B-02



( 2 ) - Two Under Seat Supports  
STP-S8-C-01

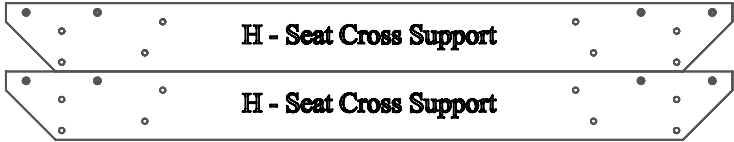

( 2 ) - Two Seat Cross Supports  
STP-DS8-D-02




( 1 ) - One Center Support  
STP-DS8-C-02



( 1 ) - One Right Small Leg  
STP-DS8-B-02



( 1 ) - One Left Small Leg  
STP-DS8-A-02



( 1 ) - One Fastener Pack  
FP-SPT8-CU-03



( 2 ) - Two Right Large Legs  
STP-DS-B-02



FP - Fastener Pack




( 2 ) - Two Left Large Legs  
STP-DS-A-02




Before assembly, please check to make sure all fasteners are included.


24 - 3/8" x 5" Hex Head Bolt

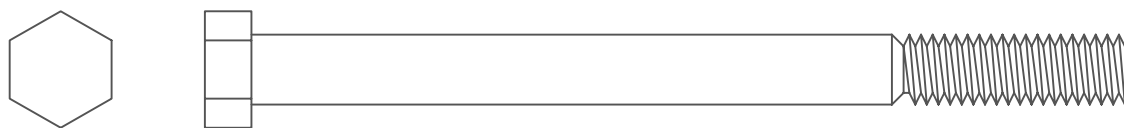


12 - 3/8" x 3" Hex Head Lag Bolt

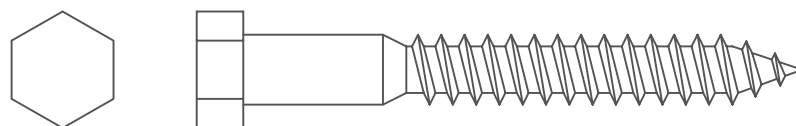


60 - 3/8" Flat Washer



24 - 3/8" Nylon Lock Nut




12 - #12 x 3" Phillips Head Flat Screw



Also needed for this assembly will be the following materials:

1 - #3 Phillips Drive Bit


2 - 9/16" Socket Wrench

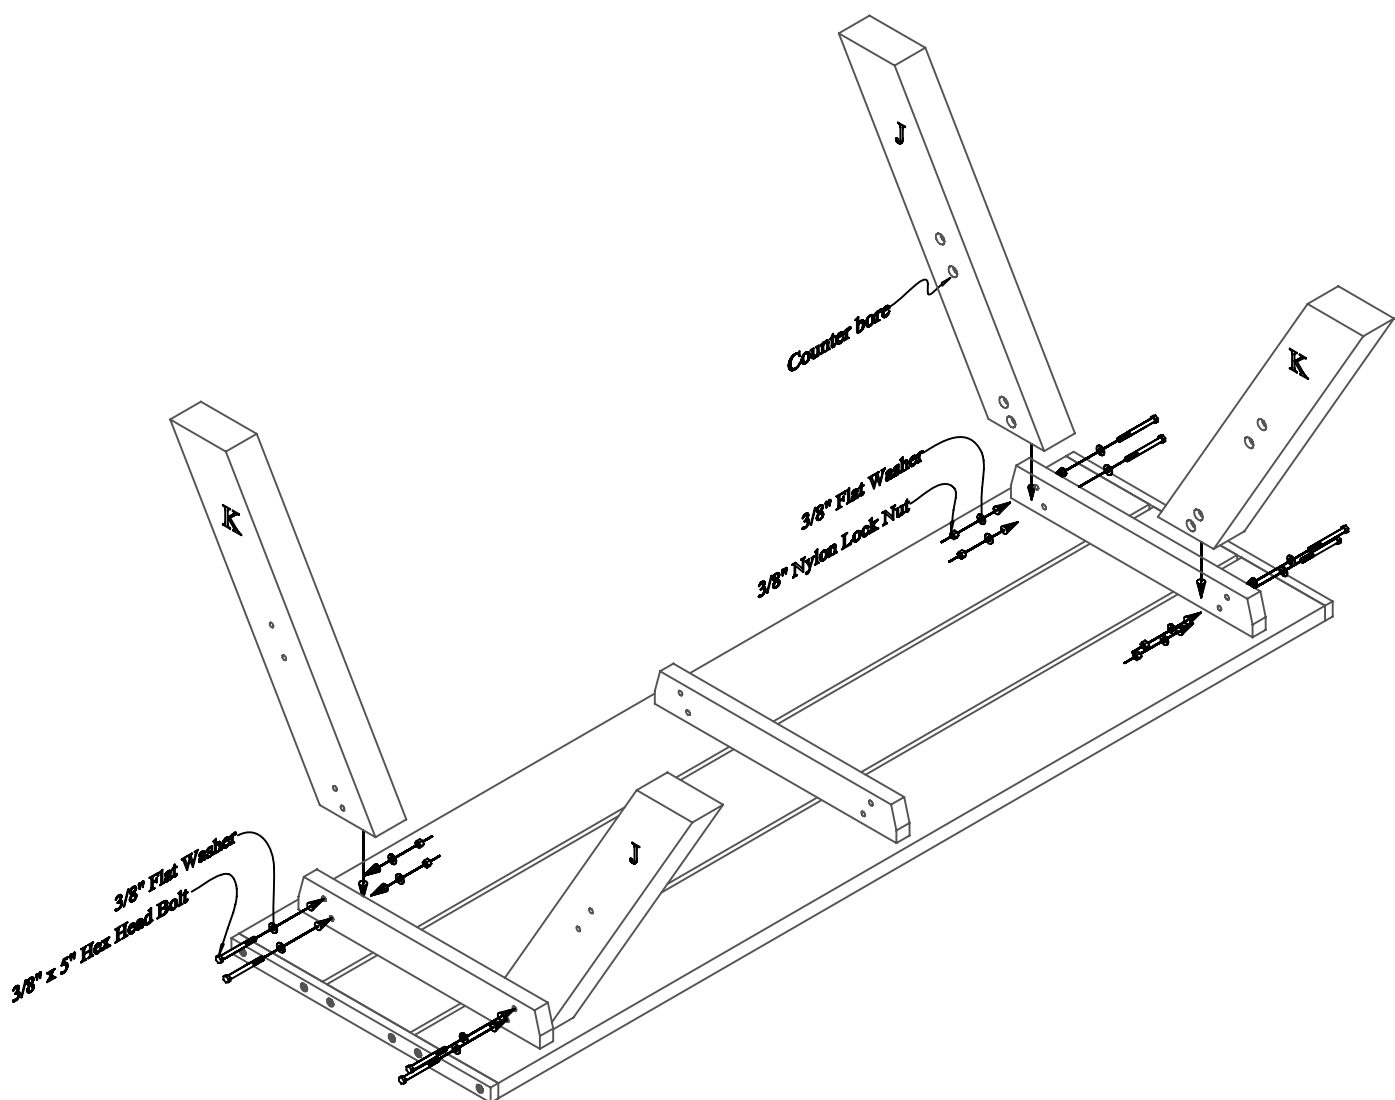

### Step #1:

While the table top is upside-down, fasten the large legs to the left and right top supports being sure that the counter bores are pointing toward the center of the table as shown above. Use ( 1 ) One 3/8" x 5" Hex Head Bolt and ( 1 ) 3/8" Flat Washer along with, ( 1 ) One 3/8" Flat Washer and ( 1 ) One 3/8" Nylon Lock Nut per hole to secure.


Note: Do not tighten bolts completely. This will be done in a later step.

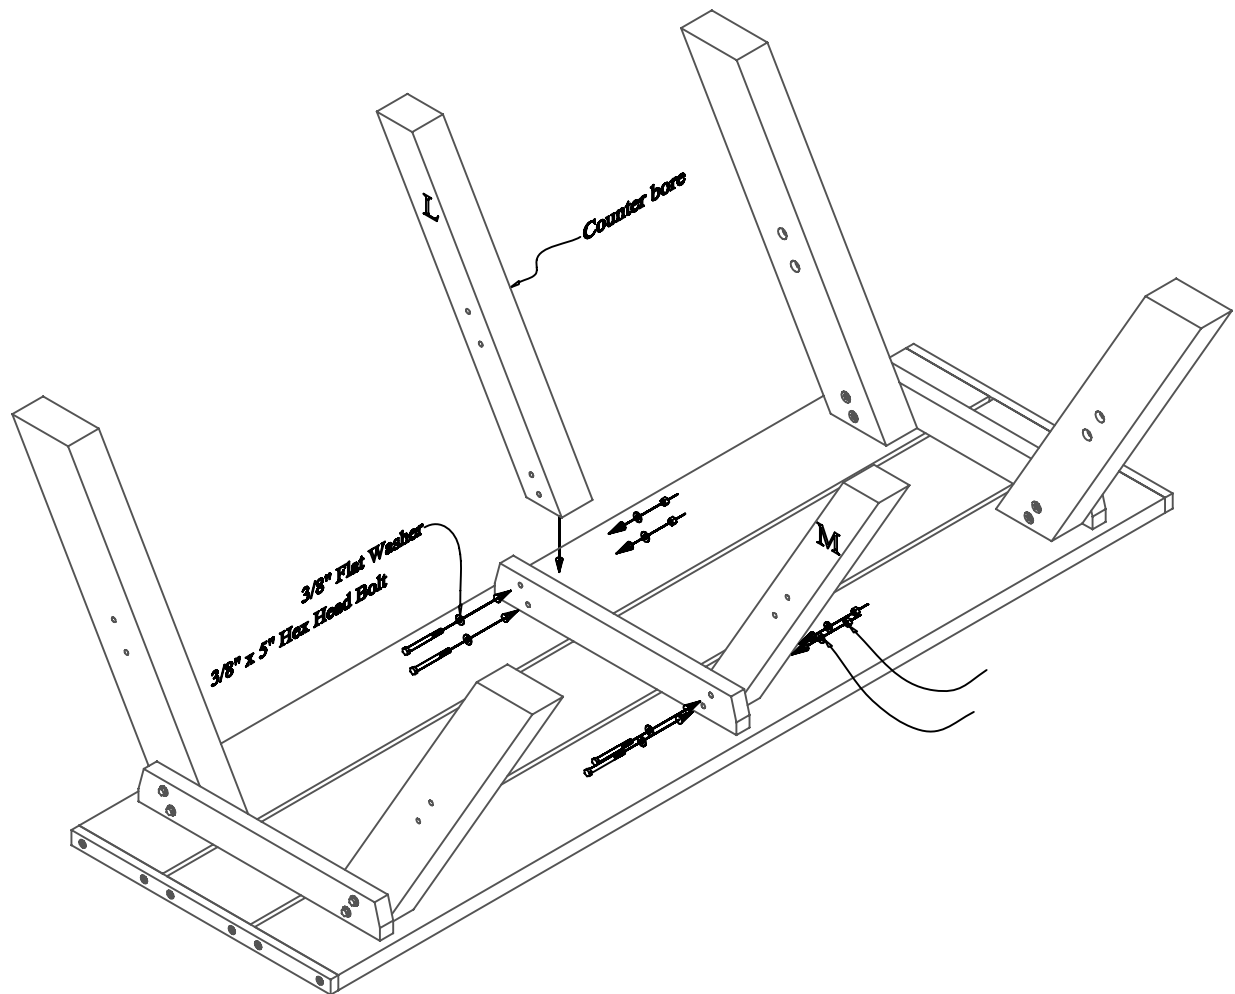

### Step #2:

While the table top is upside-down, fasten the small legs to the center top support being sure that the counter bores are pointing away from the top support as shown above. Use ( 1 ) One 3/8" x 5" Hex Head Bolt and ( 1 ) One 3/8" Flat Washer along with, ( 1 ) One 3/8" Flat Washer and ( 1 ) One 3/8" Nylon Lock Nut per hole to secure.


Note: Do not tighten bolts completely. This will be done in a later step.

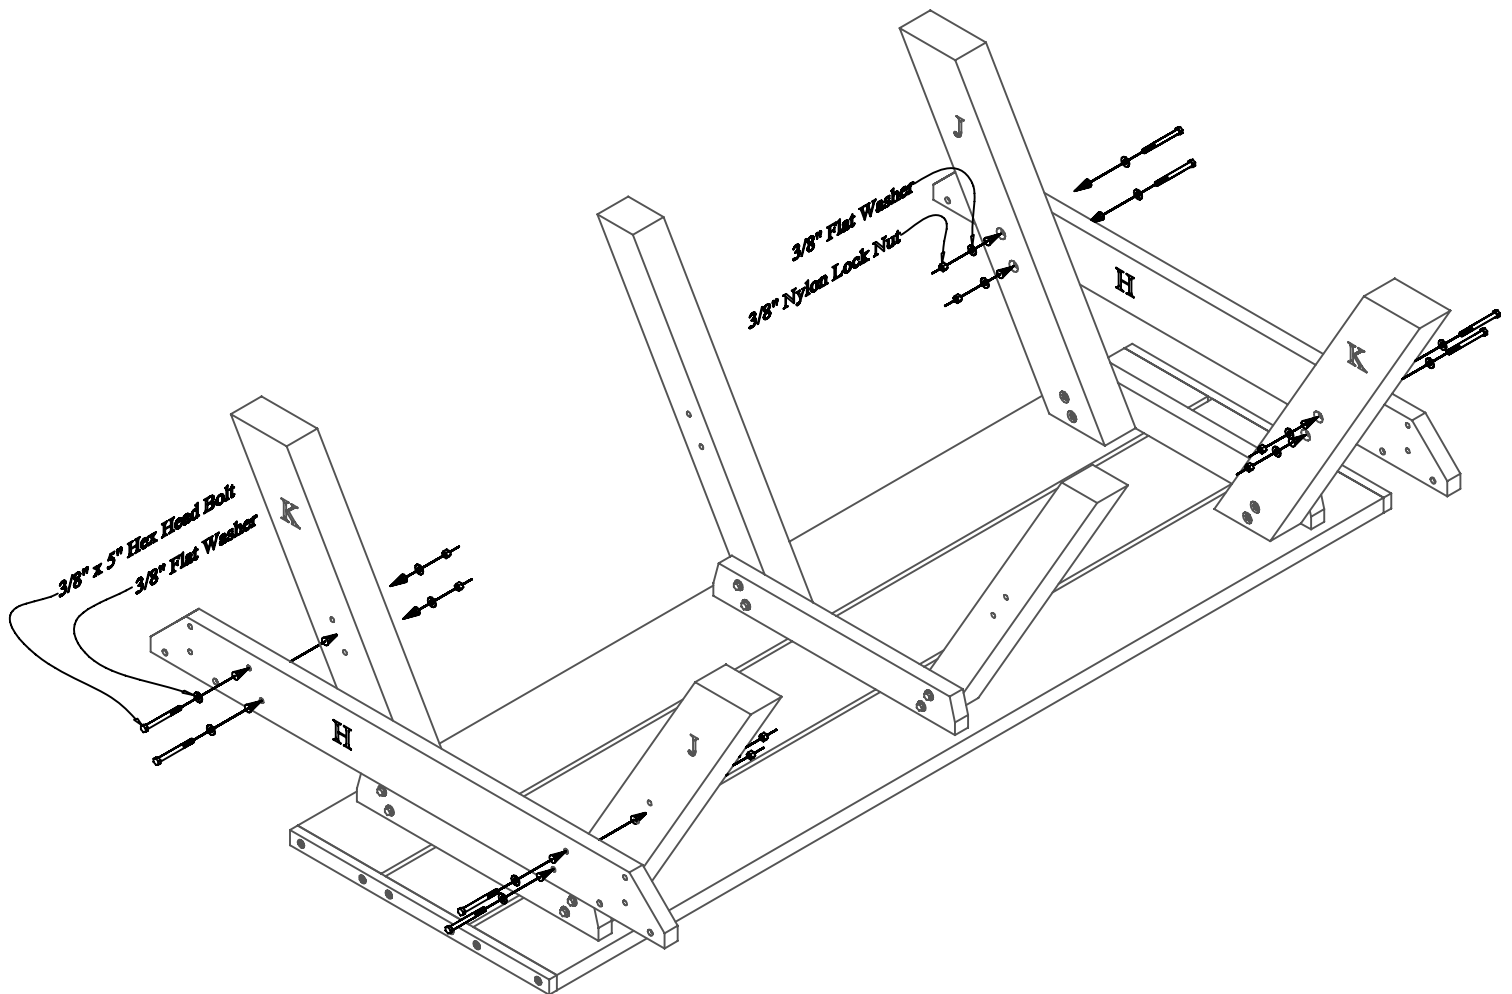

### Step #3:

While the table is upside-down, fasten the seat cross supports to the large legs. Use ( 1 ) One 3/8" x 5" Hex Head Bolt and ( 1 ) One 3/8" Flat Washer along with ( 1 ) One 3/8" Flat Washer and ( 1 ) One 3/8" Nylon Lock Nut per hole to secure.

Note: Do not tighten bolts completely. This will be done in a later step.

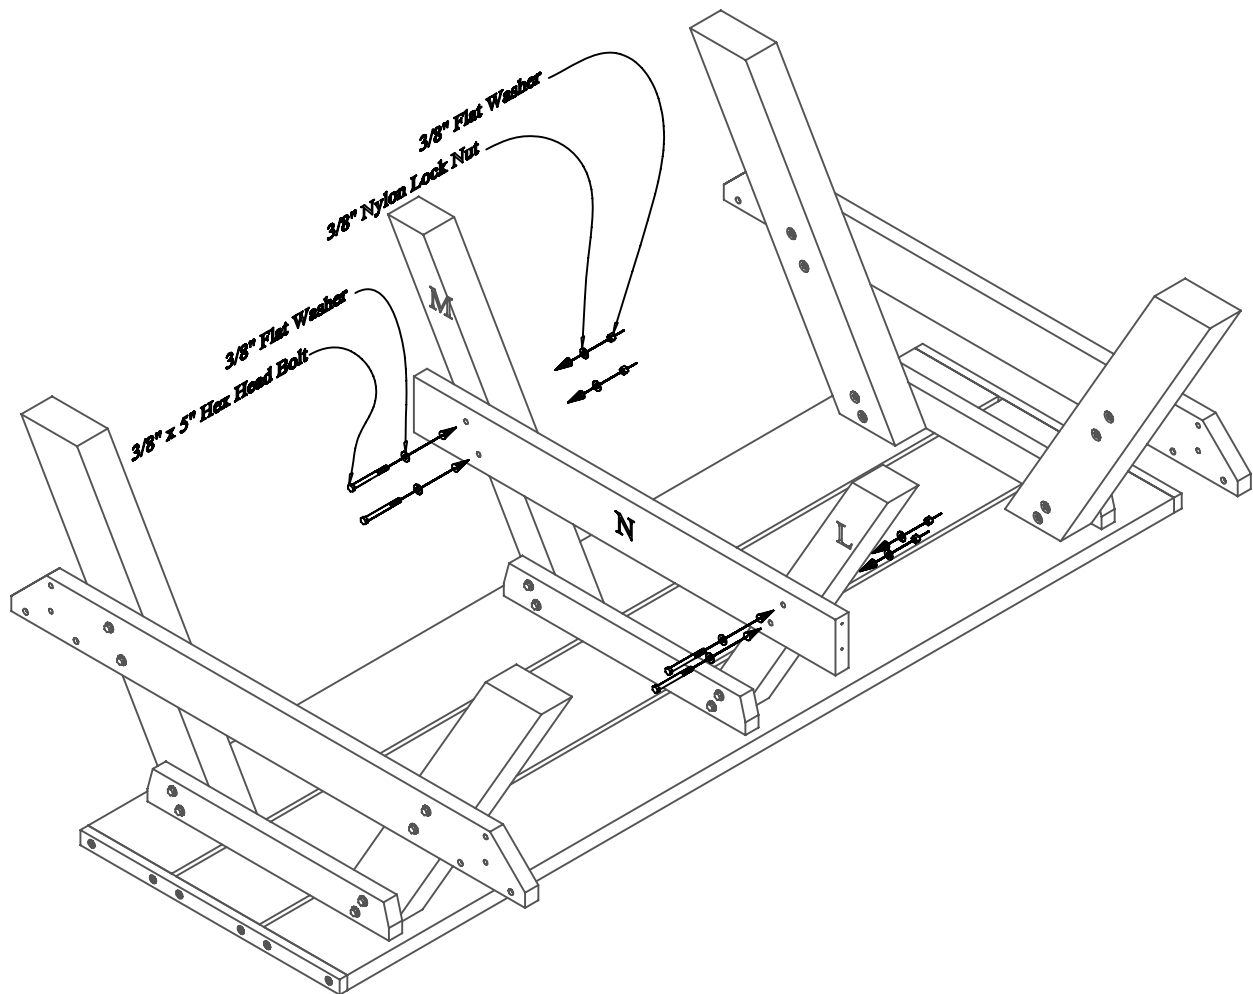


#### Step #4:

While the table is upside-down, fasten the center support to the small legs. Use ( 1 ) One 3/8" x 5" Hex Head Bolt and ( 1 ) One 3/8" Flat Washer along with ( 1 ) One 3/8" Flat Washer and ( 1 ) One 3/8" Nylon Lock Nut per hole to secure.

Note: Do not tighten bolts completely. This will be done in a later step.

### Step #5:

While the table top is upside-down, fasten the under seat supports to the seat cross supports. Use ( 1 ) One 3/8" x 3" Hex Head Lag Bolt and ( 1 ) One 3 /8" Flat Washer per hole to secure.

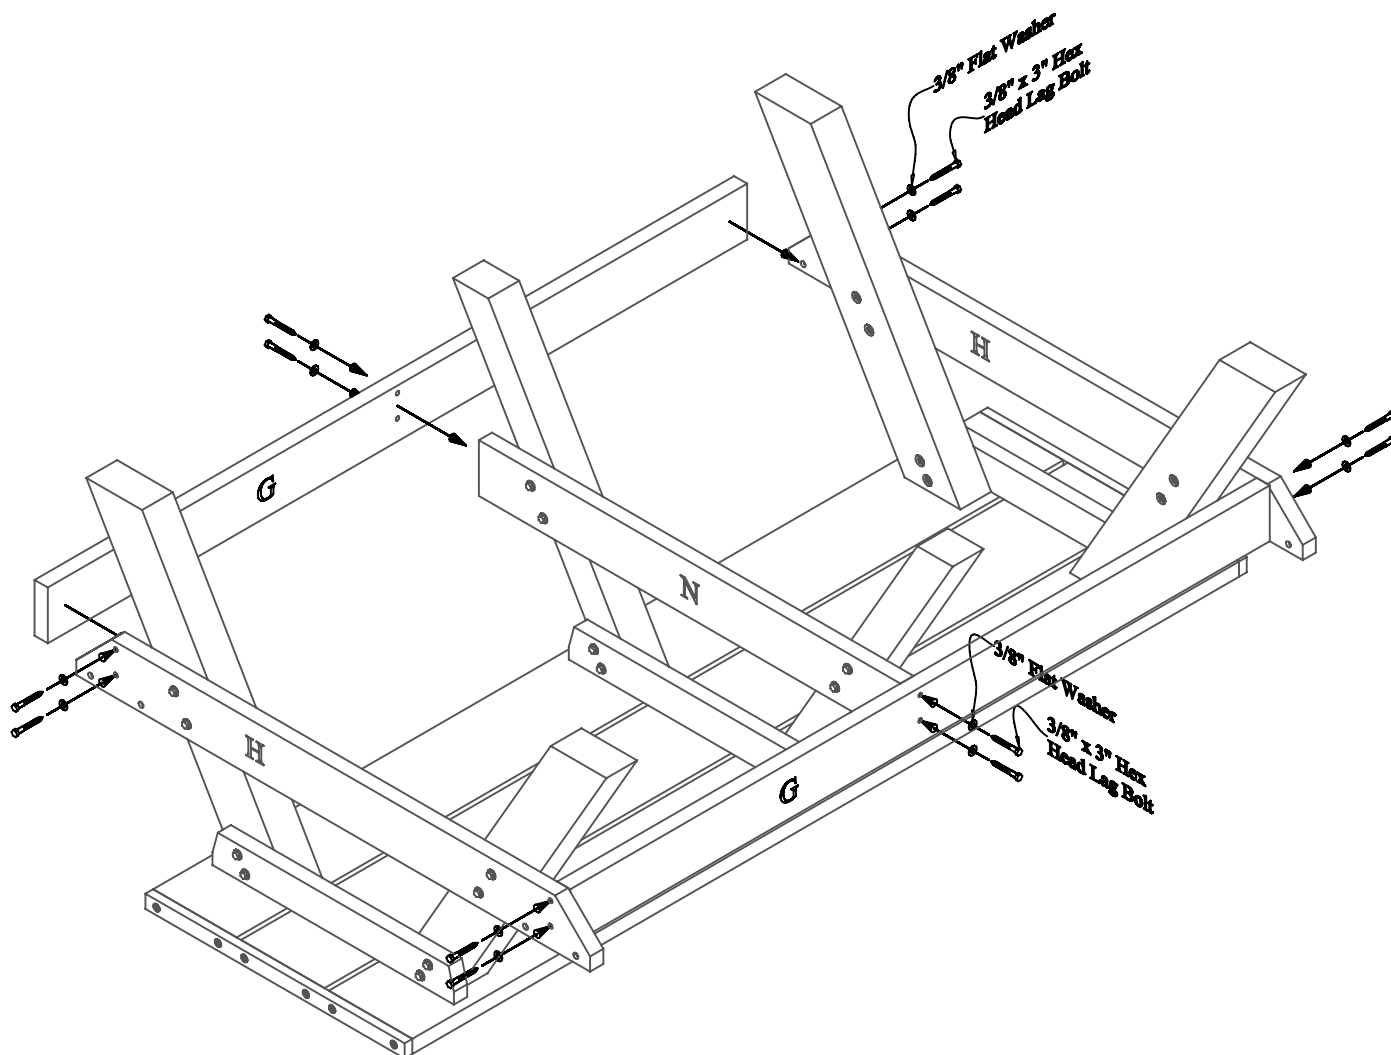


### Step #6:

Secure the under seat supports completely by fastening to the center support. Use ( 1 ) One 3/8" x 3" Hex Head Lag Bolt and ( 1 ) One 3 /8" Flat Washer per hole to secure.


Note: Be sure to tighten all loose bolts after these steps are complete.



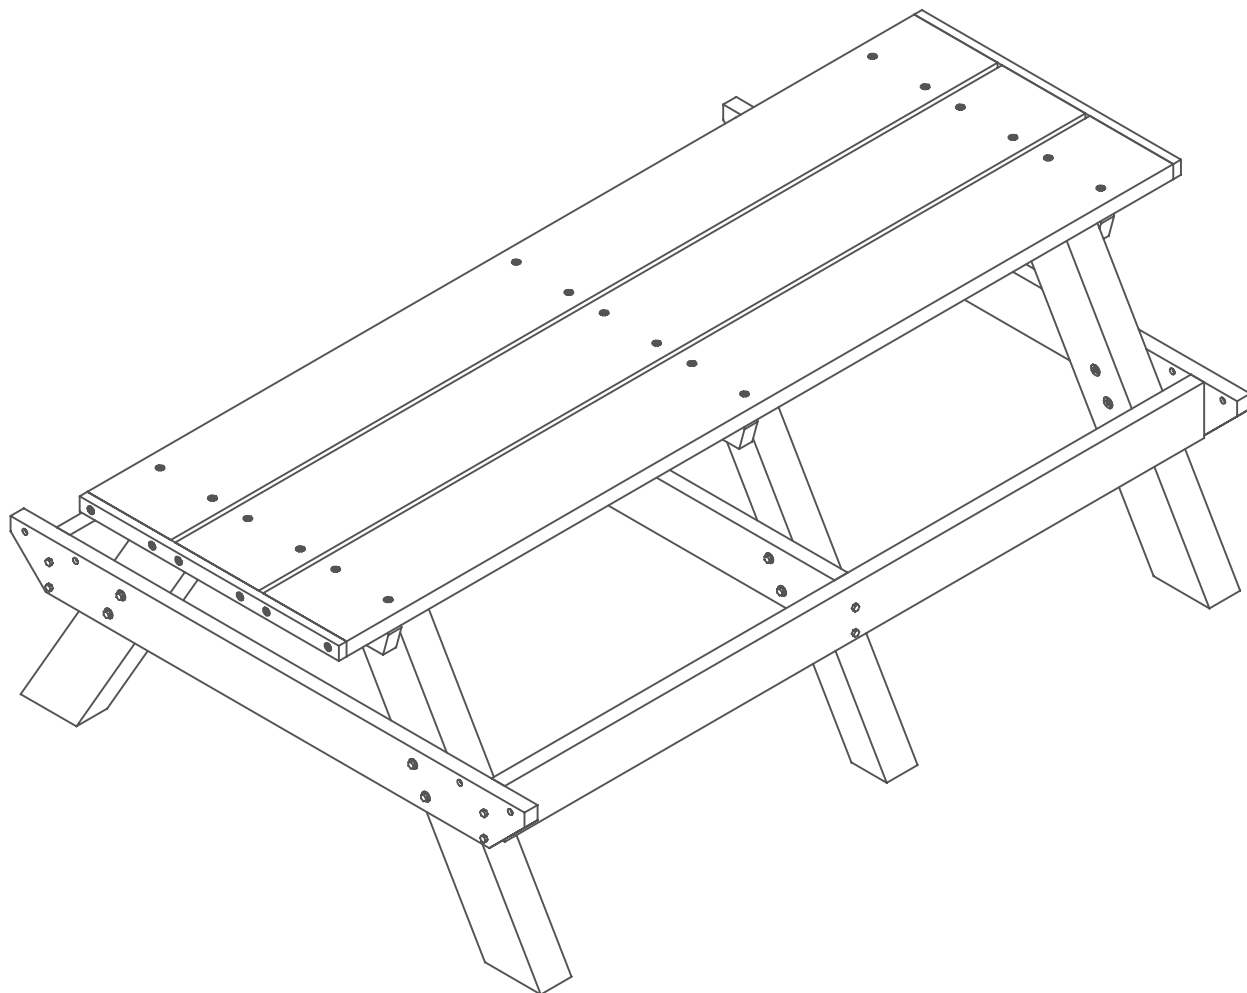

**Step #7:**

Flip the table upright onto the legs. Please take caution while flipping the table. At this point in assembly the table weighs approximately 320 Pounds.

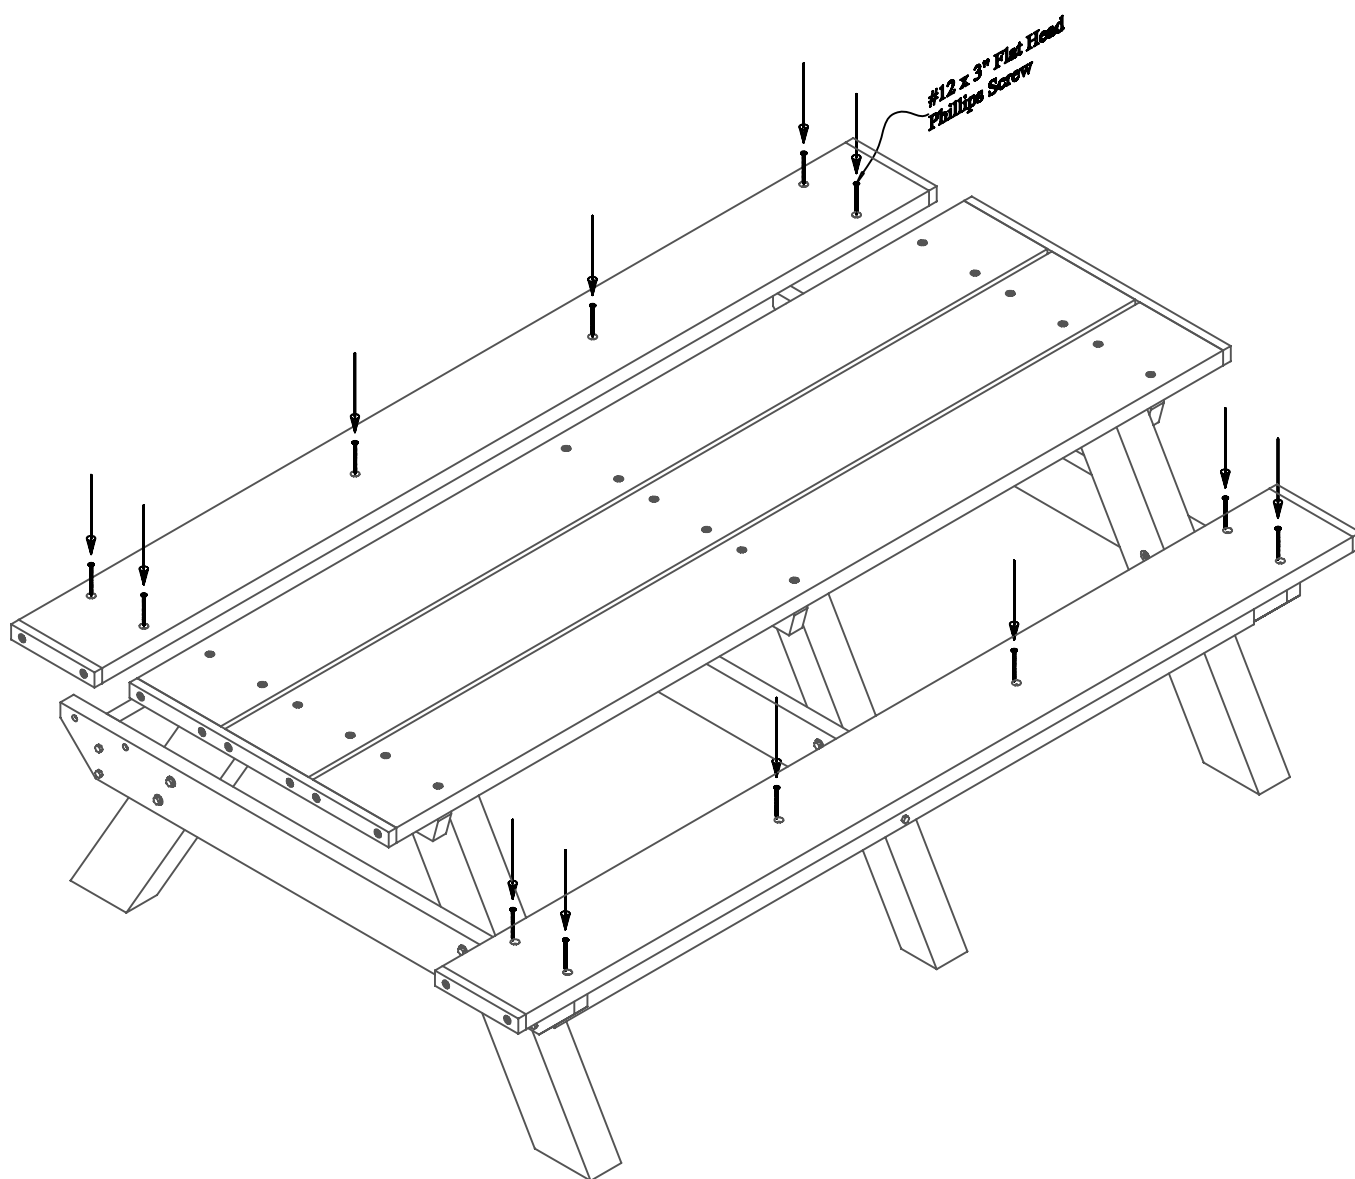

### Step #8:

While the table is upright fasten the seats to the seat cross supports and under seat supports being sure to center all holes over boards.

Use ( 1 ) One #12 x 3" Flat Head Phillips Screw per hole to secure.